



- Adjustable saw progress speed.
- Horizontal profile clamping and practical piston place adjustment system.

- The measurement is adjusted manually by the help of magnifier.
- Pneumatically fixing system.

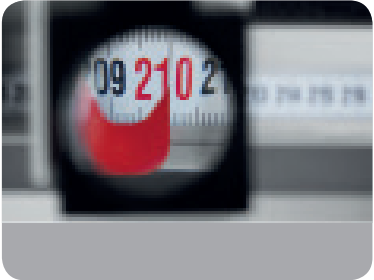

General Features

- Precise cutting of PVC profiles between 22,5°-90° outer angles.
- Right feeding unit and automatic saw safety cover.
- Double clamping system on both heads to fix the profile.
- Support plate between two heads to support the profile.
- Special design vacuum system to cut without depositing sawdusts on heads.
- Frontal and top clamping systems.
- Manual length fixing system.
- Pin support system at 45° and 90° degrees, manual adjustment at intermediate degrees.

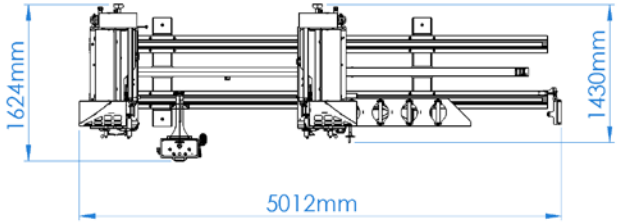

 H: 1570 mm	 400 V L1-L2-L3-N-PE 50 / 60 Hz 3kW	 1050 kg	 6-8 Bar 24 l / Cycle	 ØD: 550 mm
----------------	---	-------------	-----------------------------	----------------

